

OFFER-/ORDER FORM - HYDRO

Modernisation	New installation	Offer	Order
General Data			
Requested delivery date:		Document language:	
Purchase no.-/ Commission number:			
Contact person / Company:			
Tel, E-mail:			
Site address:			
City/-country of site address:		Packing type:	
Delivery address:			
Other info:			


Lift Data			
Suspension:		Product:	
Rated load:	kg	Cabinet Type:	
Car weight:	kg	Other:	
Empty car pressure:	bar		
Static full load:	bar		
Rated speed:	m/s		

Hydraulic Data			
Cylinder data			
New cylinder from HW?	YES	NO	
Cylinder,	Type:		Qty:
Piston diameter,	cyl 1:	mm	Piston diameter,
Piston diameter 2,	cyl 1:	mm	Piston diameter 2,
Piston diameter 3,	cyl 1:	mm	Piston diameter 3,
Piston diameter 4,	cyl 1:	mm	Piston diameter 4,
Power unit			
Valve position on tank:		Existing pump flow:	
Outlet of the hose connection (MRL):		Existing motor size:	
Hose connection (tank side):		Existing tank size:	
Hose connection (cylinder side):		New Oil spillage tray	Hose coupling
New High pressure hose from HW:		Hose clamp:	pcs
Supply voltage:		Isolation transformer	
		(if necessary to neutral zero from PE)	
Hydraulic features			
Valve UCM / A3 L10		Tank heater	
External oil level indicator		Min pressure switch type S1	
Electrical oil level switch M16		Oil cooler connections	
		Supply for oil cooler	
Hydraulic oil		pcs, 20L	Oil additive 68/D AntiStickSlip (min 2%)
			pcs, 5l

Lift / Building - Floors

Travel height:	mm	Shaft height:	mm		
Pit depth:	mm	Extra shaft cable lengths:	mm		
Headroom:	mm	Location of machine room:			
No. of floors:	pcs	No. of shaft doors:	pcs	No. of car openings:	pcs
Other:					

Floor 2-12

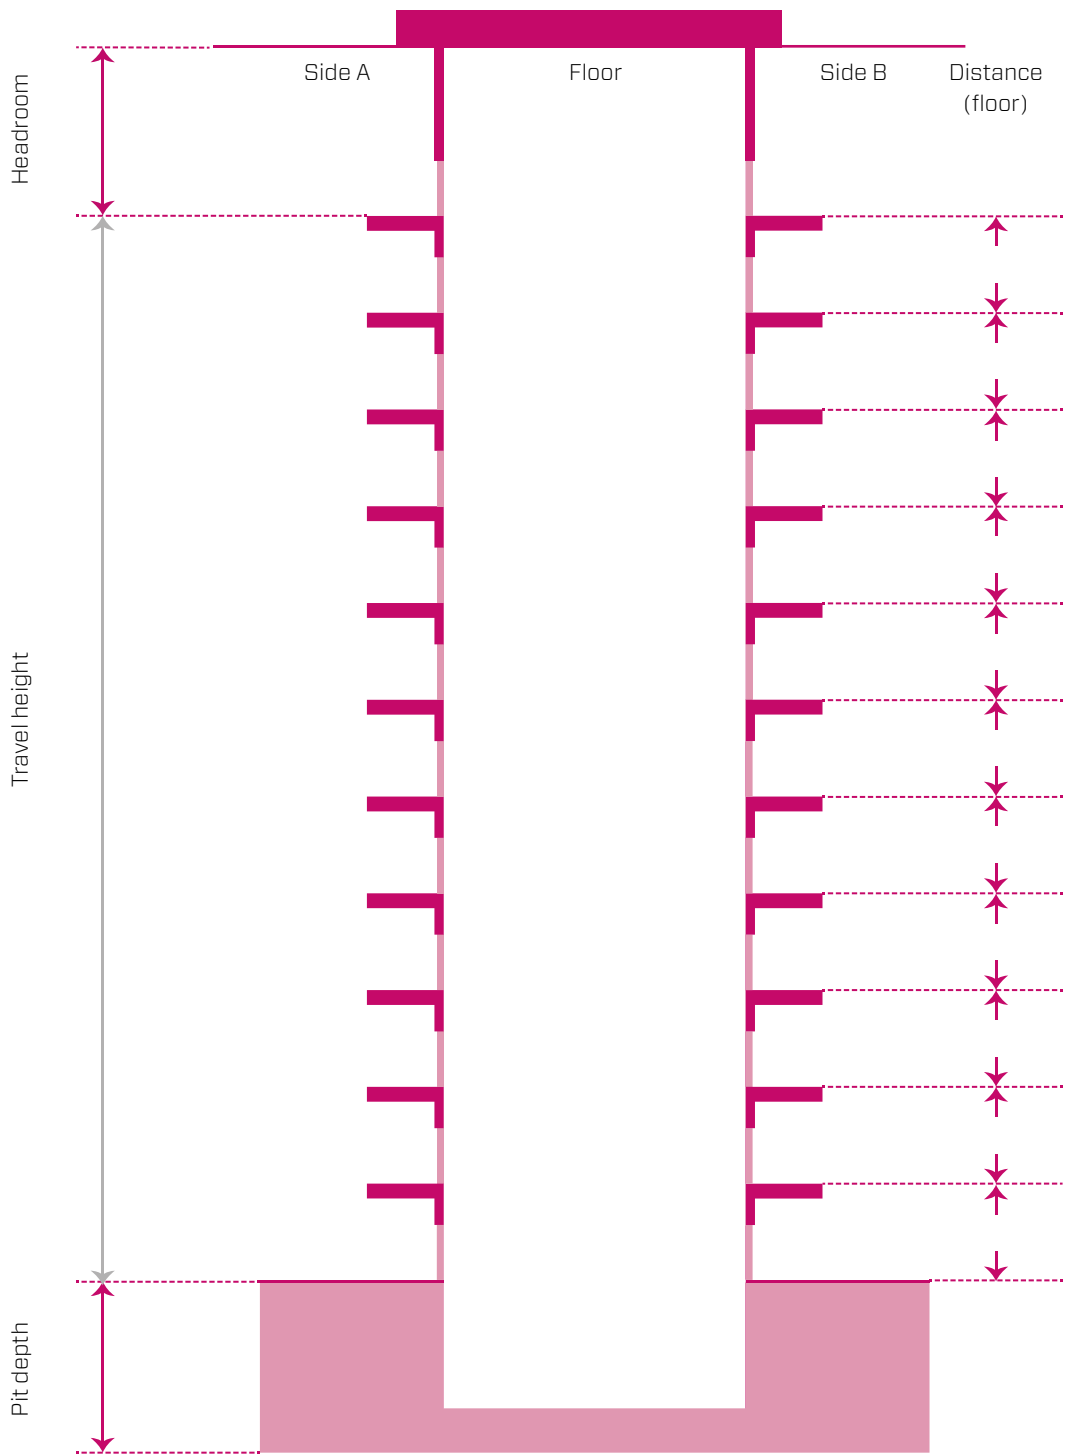

Door drives

Access side A	Door drive side A	Other:
Access side B	Door drive side B	Other:
Access side C	Door drive side C	Other:
CANOpen Door drive	Car door EN81-20	24V battery backup of doors

Automatic doors

Light curtain A:	Voltage:	24VDC	230VAC
	Other:		
Light curtain B:	Voltage:	24VDC	230VAC
	Other:		
Light curtain C:	Voltage:	24VDC	230VAC
	Other:		

Swing door

Door opener:	1-phase	3-phase	Location:
Light curtain:	Voltage:	24VDC	230VAC
Retracting ramp, voltage:	Quantity:		


Controller / Other materials

Control system:			Slack rope switch, position:	On car	In shaft
Panels from HW?	YES	NO	Pawl device, Qty:		pcs
Type:			Pawl device, Voltage:		V
Emergency phone from HW?	YES	NO	Pawl device, Contacts:		
Type:			Safety gear	One way restrictor	
No. of lift in Group:			Rupture valve, from HW:	YES	NO
Halogenfree (Shaft)			Supervised contact		
Halogenfree (motor room)			Overspeed governor, Type:		
Shaft light LED-strip (3st switches)			Overspeed governor, Voltage:		V
Qty:	Meter:		Low top		
Pull cord switch			Low top equipment		
Firemans control (not acc. to EN81-72)			EN81-21	Reset with key	
EN81-73, type:			Low pit		
Car fan	Trap door, car roof		Low pit equipment		
Foldable pit ladder with contact	Inspeciton hatch, shaft		EN81-21	Reset with key	
Collapsable barrier on car roof	Car top control, BS7255	pcs	Additional door contact (Low top & pit)		
Top runby buffer:		pcs	Location:		
			Type of contact:		
			Transformer, specify voltage:		

Other

Panels - Part 1

COP

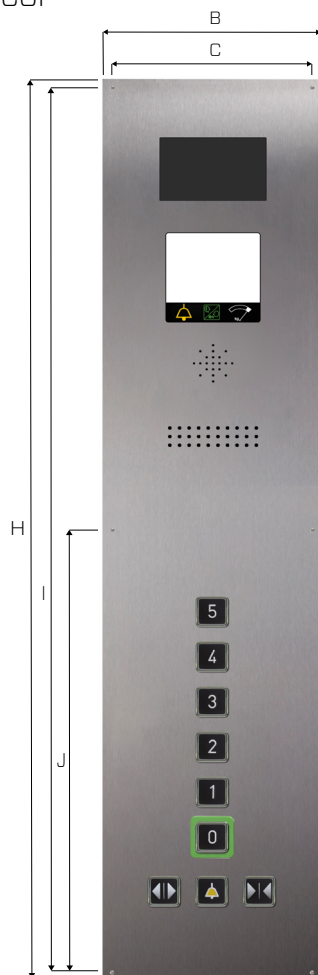

Quantity:

Dimensions:

B = mm C = mm Plate, option:
H = mm I = mm Back box
J = mm D = mm Bent edges:
mm

*std. dimensions, flush m: 230x1000 mm / 230x2000 mm
*D stands for depth of the plate (if surface m. range)

Materials:

Material:

Pictogram:

Execution:

Voice ann.:

Button type:

Key switch:

LED-color:

Function:

Indicator:

Engraving:

CANOpen indicator

Button:

Open button

Function button, function:

Close button

Floor designations:

Stopbutton

Option:

Engraving, information:

Braille on plate

Load text

Resolution glass

Install. Nr.:

Emergency light

CE/UKCA marking


Fire symbol

Logo

Other

Other:

LOP

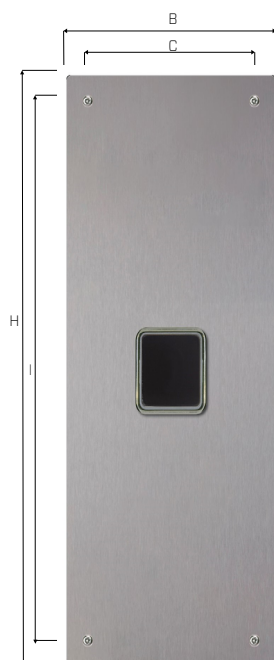

Qty with 1-button:

Qty with 2-buttons:

Dimensions:

B = mm C = mm Plate, option:
H = mm I = mm Back box
D = mm

*std. dimensions, flush m: 80x230 mm
*D stands for depth of the plate (if surface m. range)

Materials:

Material:

Key switch:

Execution:

Function:

Button type:

LED-color:

Indicator:

CANOpen indicator

Symbol pushbuttons

No. of LOP with arrow up: pcs

No. of LOP with arrow up/down: pcs

No. of LOP with arrow down: pcs

Option:

Engraving, information:

Braille on plate

Load text

Occupied lamp

Logo


Lamp, arrow up/down

Fire symbol

Other:

Panels - Part 2

CIP / LIP

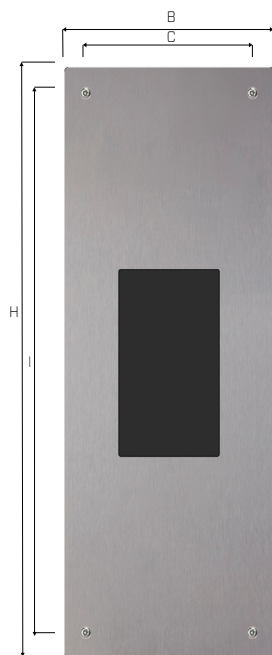

Quantity:

Dimensions:

B = mm C = mm

H = mm I = mm

D = mm

Plate, option:

Back box

Bent edges:

mm

*D stands for depth of the plate (if surface m. range)

Materials:

Material:

Execution:

Indicator:

CANOpen indicator

Pictogram:

Voice ann.:

Design:

Option:


Speaker, gong

Logo

Other:

Cover plate

Quantity:

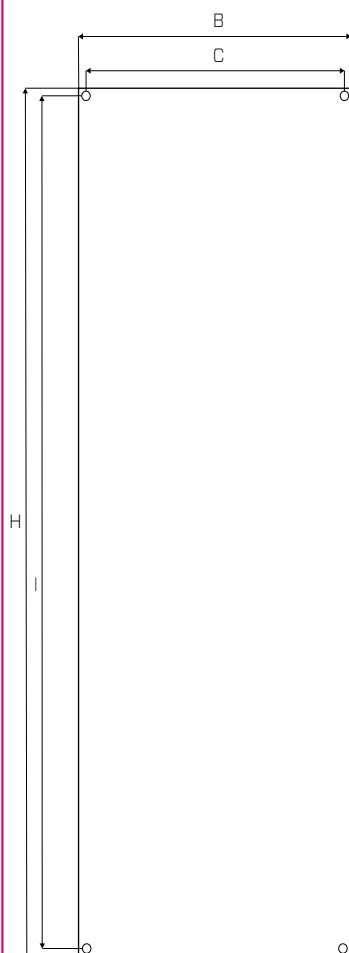

Dimensions:

B = mm C = mm

H = mm I = mm

Materials:

Material:

Execution:

Other: